


SenderCAN™

SAE J1939 input/output module

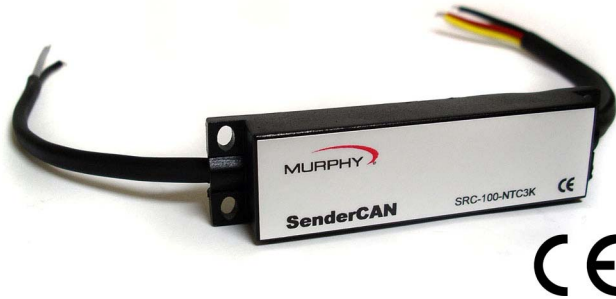

Features

- Compatible with SAE J1939 CANbus engines
- Up to 4 sender/switch inputs
- Up to 2 gauge/control outputs
- OEM specified, factory set input/output scaling, PGN address and update rates
- Compact, sealed epoxy-filled case

SenderCAN™ is a compact, encapsulated input & output module for J1939 CANbus systems. SenderCAN allows the integration of analogue and digital measurement, control and indicating devices into modern CAN and ECU-based engines and systems.

SenderCAN has up to four inputs and two outputs, each of which is factory configured to OEM requirements. Inputs can be set for use with resistive sender or switch signals, which are translated into J1939 CANbus messages with appropriate PGN address, data scaling and transmission rate. Outputs can be configured to drive gauges, lamps, relays or other control devices, based on received J1939 data.

Standard versions are available for use with common senders (e.g. FuelCAN model FLC300 for fuel level senders), but SenderCAN is primarily intended for OEM-specified input, output and CANbus requirements. Please note that minimum order quantities or charges apply for custom solutions.

SenderCAN is compact and light enough for inclusion in many wiring harnesses, but can also be surface mounted via four fixing holes. The case is fully sealed in epoxy resin for high impact and environmental resistance.

Specifications

Power supply

Operating voltage: 7 to 18 VDC

Current consumption: 25mA (typ.)

Input/Output

Input range: OEM/application specific, -2 to +18 VDC max.

Output: OEM/application specific, 250mA max.

CANbus:

SAE J1939 protocol, optional 120 Ohm terminating resistor

Physical

Case material: high impact ABS, epoxy filled

Dimensions: see diagram below

Weight: approx 60 g / 0.13 lb

Operating temperature: -20 to +85 °C / -4 to +185 °F

Environmental sealing: IP65 case, exposed lead ends

Electromagnetic compatibility: 2004/108/EC

How to order

Model code: **SRC 0 -**

Number of inputs:
1, 2, 3 or 4


Number of outputs:
1 or 2

Code for input, output & J1939 specification. Please contact your Murphy representative to discuss requirements.

Connection & Dimensions

(SRC402 shown, with optional input negative/common wiring)

Dimensions in mm (in.) for reference only. Use actual product for template.

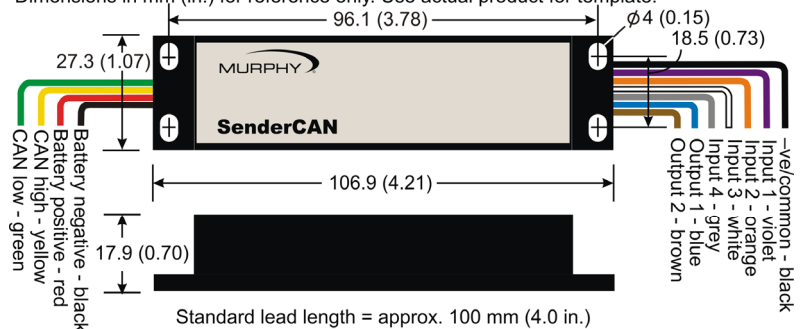

FW MURPHY

P.O. Box 470248, Tulsa, Oklahoma 74147 USA
+1 918 317 4100 Fax: +1 918 317 4266
E-mail: sales@fwmurphy.com

INDUSTRIAL PANEL DIVISION

Fax: +1 918 317 4124
E-mail: ipdsales@fwmurphy.com

MURPHY POWER IGNITION

Website: www.murphy-pi.com

CONTROL SYSTEMS AND SERVICES DIVISION

P.O. Box 1819, Rosenberg, Texas 77471 USA
Phone: +1 281 633 4500 Fax: +1 281 633 4588
E-mail: css-solutions@fwmurphy.com

FRANK W. MURPHY LTD.

Church Road, Laverstock,
Salisbury, SP1 1QZ, United Kingdom
Tel: +44 1722 410055
Fax: +44 1722 410088
E-mail: sales@fwmurphy.co.uk
Web: www.fwmurphy.co.uk

COMPUTRONIC CONTROLS

41 - 46 Railway Terrace, Nechells,
Birmingham, B7 5NG, United Kingdom
Tel: +44 121 327 8500
Fax: +44 121 327 8501
E-mail: sales@computroniccontrols.com
Web: www.computroniccontrols.com

Murphy 摩菲 仪表授权经销商

信德迈科技(北京)有限公司 CNMEC Technology (Beijing) Co., Ltd.
地址: 北京市朝阳区胜古中路2号金基业大厦201室 邮编: 100029
电话: 010-8428 2935, 8428 9077, 13910962635

Http: //www.cnmec.com

Email: sales@cnmec.biz

传真: 010-8428 8762



USA-ISO 9001:2000 FM 28221
UK-ISO 9001:2000 FM 29422
Registered Facilities

