

MurphyLink® Series ML25 Panels



Features


- Tier 4/Stage IIIB/IV Compliant/Ready
- Compact J1939-compliant device for electronically controlled engines
- Displays up to 20 standard J1939 parameters
- Active and stored diagnostic trouble codes
- Provides enhanced visual alarm indication using bright ALARM and SHUTDOWN LEDs

The MurphyLink® Series ML25 Panels feature the PowerView™ PV25, an engine and diagnostic display in an economical and compact package. This J1939-compliant device provides electronic engine parameter data, is simple to install, and matches the PowerView line of rugged displays. The PV25 can be powered by 12 or 24 volt systems.

The PV25 is equipped with two push buttons to quickly access a convenient menu. In addition, a back-lit graphic display and two LED's indicate Active-fault Alarm or Shutdown status.

Active and Stored Fault messages display the SPN (Suspect Parameter Number), FMI (Failure Mode Indicator) and the OC (Occurrence Count) using the SAE J1939 protocol.

Product and Mounting Dimensions

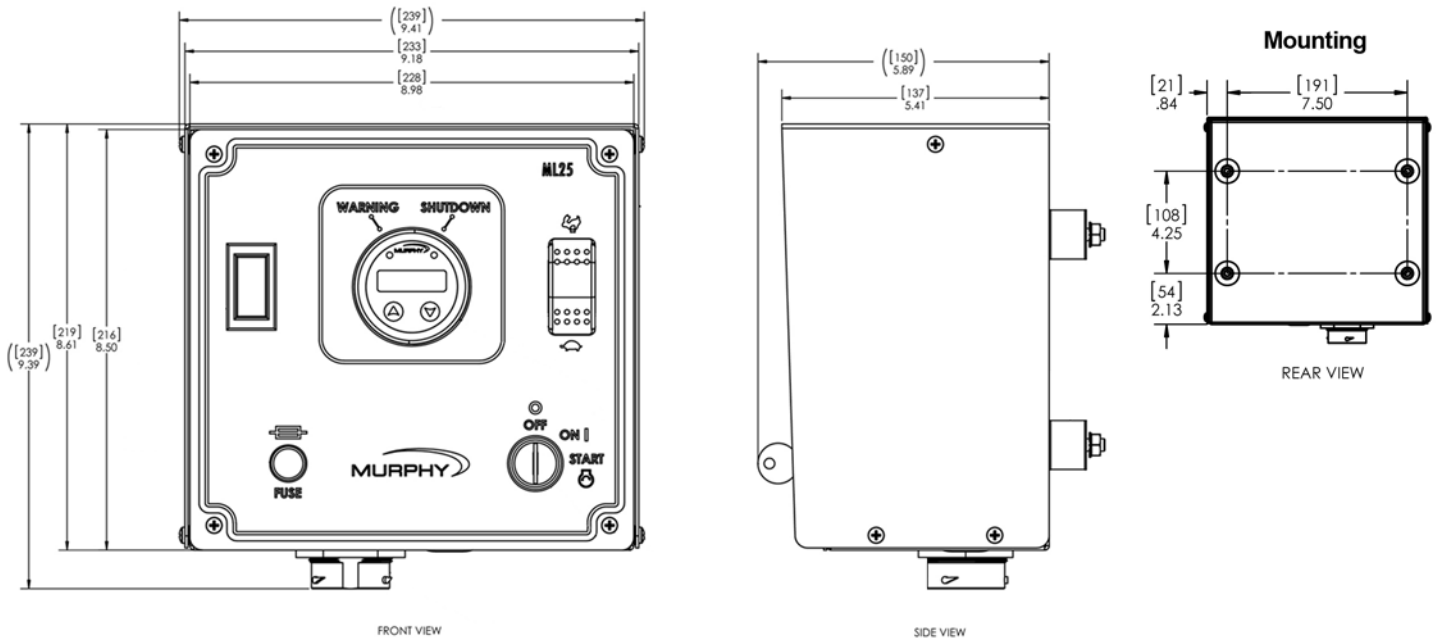

Specifications

Operating Voltage:	12/24 VDC (6.5-32VDC Minimum and Maximum Voltage)
Operating Current:	850mA MAX
Mounting:	4-.75" Rubber Isolated Shockmounts
Starting Method:	KeySwitch
Stopping Method:	KeySwitch
Display:	PowerView Model 25
Indication Lamps:	One red, One Amber via PV25 Display
Enclosure Material:	Powder Coated Cold Rolled Steel
Wiring Interface:	1-Deutsch HDP 21pin Connector
Throttle Method:	Rocker Switch (Digital Inputs to ECU)
Tier 4 Regeneration:	CAN Enabled (via PV25) or Rocker Switch (via Digital Input to ECU)
Operational Temperature:	-40° to +70°C (-40° to +158°F)
Storage Temperature:	-55° to +85°C (-67° to +185°F)
Box Dimensions:	15.4 X 13.4 X 8.5
Shipping Weight:	9.5 lbs

How to Order

<i>Description</i>	<i>Throttle</i>	<i>Volt</i>	<i>Panel</i>	<i>Model Number</i>	<i>Part #</i>
PV25 Flat Only	PTO Ramp	12/24	Flat	ML25-FP	32700190
PV25 Enclosed			Enclosed	ML25	32700191
PV25 Flat Only w/ T4 switch	PTO Ramp T4 Rocker	12/24	Flat	ML25-T4-FP	32700192
PV25 Enclosed w/ T4 switch			Enclosed	ML25-T4	32700193



北京

信德迈科技(北京)有限公司 CNMEC Technology
地址：北京市朝阳区安贞桥胜古中路2号金基业大厦201室
邮编：100029
*Tel: 010-8428 2935 | * Fax: 010-8428 8762
*手机：139 1096 2635
*电子邮件：sales@cnmec.biz
主页：http://www.cnmec.com