



READ FIRST - IMPORTANT!
L150/EL150K1/EL150EX Series
Level Switchgag

sect. 15 00-02-1164
 rev. 2018/08/09

Please read the Installation Manual (P/N 00-02-0171) before installing the L150/EL150K1. The latest version and product support can be found at: support.enovationcontrols.com, then search for L150.

Alternately, scan this QR code:



Inventory Control Bar Code:



Quick Specifications:

Max Temperature (all models): 250° F (121° C)

Max Operating Pressure (all models): 25 PSI (172 kPa)

Mounting Holes (L150 and EL150K1): (2) 9/32 in. (7 mm) diameter at 4-1/2 in. (114 mm) on center


Mounting Holes (EL150EX): (2) 5/16 in. (8 mm) diameter at 5-1/2 in. (140 mm) on center

Contact Rating (L150): 2 A @ 30 VAC/DC. Wire: (1) 16 AWG x 26 in. (1.5 mm 2 x 660 mm) with terminals


Snap-Switch (EL150K1 and EL150EX): SPDT rated 10 A @ 125 VAC; 0.5 A @ 125 VDC; 10 A 30 VDC

Dimensions


L150

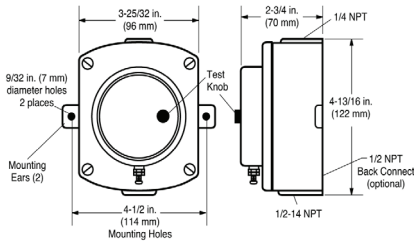

EL150K1

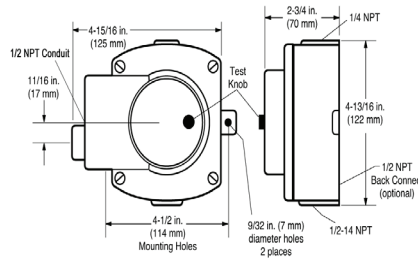


EL150EX

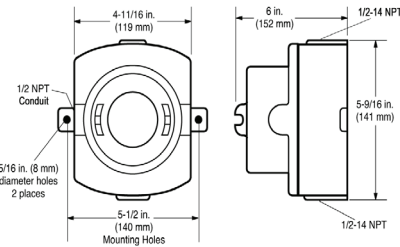


Standard Electrical Diagrams


L150



EL150K1

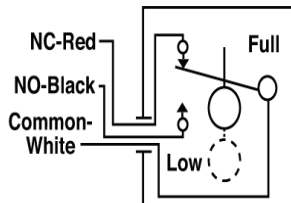

EL150EX



WARNING: This typical wiring diagram is shown for clarity only. It is not intended for use as installation instructions.