

# Level Swichgag<sup>®</sup> Instrument For Engine Liquids L150/ EL150K1 Series



## Features

- Monitors Level of Coolant, Lube Oil, Diesel Fuel And Hydraulic Fluid.
- Indicating Gauge
- Low Limit Switch
- Float Operated
- Explosion-Proof Model Is Available



EL150EX Models are CSA Listed for Class I, Division 1, Group C & D Hazardous Locations.

1 Products covered by this bulletin comply with EMC Council directive 89/336/EEC regarding electromagnetic compatibility except as noted.


The L150 Series Level Swichgag instrument is a combination liquid level gauge and low limit switch; each unit includes (1) a chamber with pivotal float, (2) an indicating dial with pointer, and (3) a low level contact. When properly installed and maintained, the float operates the pointer which, in turn, both indicates level during normal operation, and closes a switching circuit if the level falls to the low-limit set point.

## Applications


The primary use of the L150/EL150K1 is for engine cooling systems, surge or expansion tanks, condenser radiator or vapor phase systems, pressurized or atmospheric systems. The Level Swichgag instrument can also be used to monitor lube oil, hydraulic fluid or diesel fuel reservoirs and activates alarms and/or shut-down at a predetermined minimum level. These instruments are built for low pressure systems with a maximum of 25 psi (172 kPa) [1.72 bar].

## Dimensions


### L150

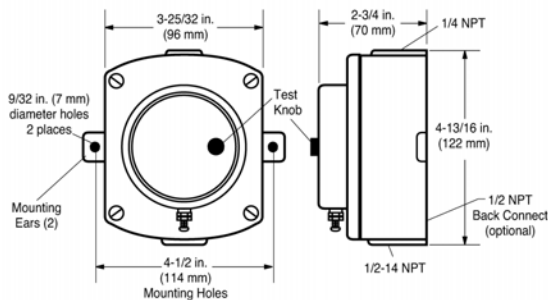

### EL150K1

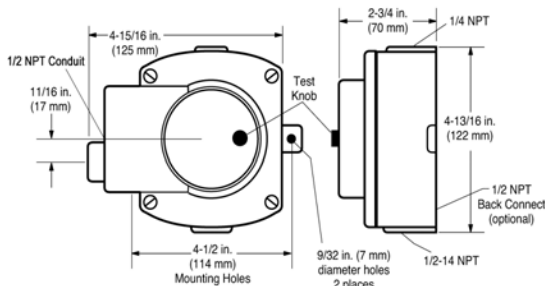

### EL150EX

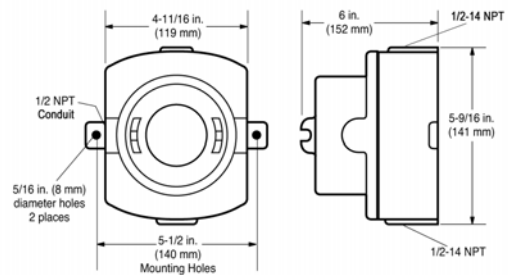


## Standard Electrical Diagrams




WARNING: This typical wiring diagram is shown for clarity only. It is not intended for use as installation instructions.


### L150



### EL150K1




### EL150EX




## Radiator Fittings

Murphy PS, PS Barbed and PS-D fittings allow the installation of the L150/EL150K1 to the radiator when a fitting is not available.

- **15-00-0107 (PS):** thin wall, 1/4 in. (6 mm) tube fitting.
- **15-01-0167 (PS-Barbed):** thin wall, 1/4 in. (6 mm) tubing or hose.
- **15-01-0202 (PS-D):** for diesel or oil, thick wall (to 1/4 in. [6 mm]), accepts 1/2 in. (13 mm) I.D. hose or 1/4 in. (6 mm) O.D. tubing.



15-00-0107 (PS)

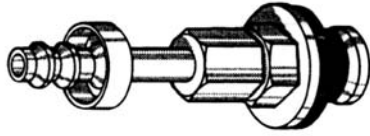

15-01-0167 (PS Barbed)

## Repair Kits

### L150

- 15-00-0138 All parts except case and body
- 15-00-0101 Case/body assembly

### EL150K1

- 15-00-0139 All parts except case and body
- 15-00-0101 Case/body assembly
- 15-00-0100 Lens/switch assembly

### EL150EX

- 15-00-0110 Cover and float assembly
- 15-00-0108 Lid assembly
- 15-00-0109 Switch/terminal assembly

## Accessories

### Specify

- 15-00-0107
- 15-01-0202
- 15-01-0167

### Description

- Radiator fitting (PS)
- Radiator fitting (PS-D)
- Radiator fitting (PS Barbed)

## Specifications

### L150 Specifications

**Case:** Die cast aluminum, poly-urethane coated; approximate dimensions; 4-1/2 x 4-3/4 x 2-3/4 in. (114 x 121 x 70 mm).

**Mounting Holes:** (2) 9/32 in. (7 mm) diameter at 4-1/2 in. (114 mm) on center.

**Float:** Brass.

**Lens:** Polycarbonate.

**O-rings:** Saturated Nitrile, are suitable for coolant or hydrocarbons. Maximum temperature 250°F (121°C).

**Gasket:** Nitrile.

**Vent Tube:** 1/4 x 5 in. (6 x 127 mm) copper cane with 1/4 NPT x 1/4 in. (6 mm) tube fitting.

**Contact Rating:** 2 A @ 30 VAC/DC.

**Wire:** (1) 16 AWG x 26 in. (1.5 mm<sup>2</sup> x 660 mm) with terminals.

**Shipping Weight:** 29 oz. (0.82 kg.).

**Shipping Dimensions:** 5-1/4 x 5-1/4 x 5-1/2 in. (133 x 133 x 140 mm).

### EL150K1 Specifications

**Case:** Die cast aluminum, poly-urethane coated; approximate dimensions; 5 x 4-3/4 x 2-3/4 in. (127 x 121 x 70 mm).

**Mounting Holes:** (2) 9/32 in. (7 mm) diameter at 4-1/2 in. (114 mm) on center.

**Float:** Brass.

**Lens:** Polycarbonate.

**O-rings:** Saturated Nitrile, are suitable for coolant or hydrocarbons. Maximum temperature 250°F (121°C).

**Gasket:** Nitrile.

**Vent Tube:** 1/4 x 5 in. (6 x 127 mm) copper cane with 1/4 NPT x 1/4 in. (6 mm) tube fitting.

**Snap-Switch:** SPDT rated 10 A @ 125 VAC; 0.5 A @ 125 VDC; 10 A 30 VDC.

**Wire:** (3) 18 AWG x 14 in. (1 mm<sup>2</sup> x 356 mm).

**Shipping Weight:** 42 oz. (1.2 kg.).

**Shipping Dimensions:** 5-1/4 x 5-1/4 x 5-1/2 in. (133 x 133 x 140 mm).

### EL150EX Specifications

**Case:** Sand cast aluminum, painted; approximate dimensions; 6-1/2 x 5-3/4 x 5-1/4 in. (165 x 146 x 133 mm).

**Mounting Holes:** (2) 5/16 in. (8 mm) diameter at 5-1/2 in. (140 mm) on center.

**Float:** 304 Stainless steel.

**Lens:** Tempered glass.

**O-rings:** Saturated Nitrile, are suitable for coolant or hydrocarbons. Maximum temperature 250°F (121°C).

**Gasket:** Nitrile.

**Vent Tube:** 1/4 x 5 in. (6 x 127 mm) copper cane with 1/4 NPT x 1/4 in. (6 mm) tube fitting and 1/2 NPT to 1/4 NPT reducer fitting.

**Snap-Switch:** SPDT rated 10 A @ 125 VAC; 0.5 A @ 125 VDC; 10 A 30 VDC.

**Wire:** Wired to terminal block.

**Laboratory Approvals:** CSA Listed for Hazardous Locations Class I, Division 1, Groups C & D.

**Shipping Weight:** 5 lbs. (2.26 kg.).

**Shipping Dimensions:** 6-1/2 x 6-3/4 x 6-3/8 in. (165 x 171 x 162 mm).

MURPHY摩菲仪表授权经销商：

CNMEC Technology (Beijing) Co.,Ltd.

信德迈科技(北京)有限公司

地址：北京市朝阳区胜古中路2号金基业大厦201室

邮编：100029

电话：010- 8428 2935, 8428 9077,

Http://www.cnmec.com

Email: sales@cnmec.biz

传真：010-8428 8762

**Warranty** - A limited warranty on materials and workmanship is given with this FW Murphy product.  
A copy of the warranty may be viewed or printed by going to <http://www.fwmurphy.com/warranty>