
Oil Pressure Tubing Kit

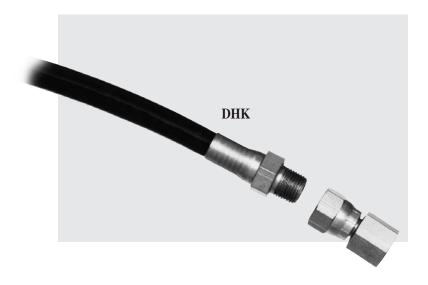

DHK Model

- Custom Fit Oil Pressure Line for Any Engine
- Swaged Fittings
- Wide Pressure and Temperature Compatibility
- Tough Materials for Industrial Use
- Adapters for U.S. or Metric

Description

The Deluxe (DHK) oil pressure tubing kit can be used with a variety of Murphy SWICHGAGE® and MURPHYGAGE® instruments. This kit consists of gauge fitting, pressure tubing, and engine fitting.


The Deluxe kit is ideal for heavy-duty industrial applications. The nylon core is reinforced with a synthetic fiber braid and polyurethane cover. Both ends of the pressure tubing have swaged fittings.

The Deluxe kit allows you to choose the type of gauge and engine fittings for your application. Choose straight or elbow fittings for both gauge and engine connections. In addition, the kit offers a variety of engine adapters to fit your application. These adapters are available in U.S. or metric threads.

Features

Deluxe Kit

- Tubing will not swell or absorb fluids which can cause restriction of the I.D. or release contaminants into the system.
- Synthetic fiber reinforcing braid eliminates wire that often fatigues, breaks, and may puncture the core tube.
- Thermoplastic core tube is resistant to practically all oils and hydraulic fluids.
- Swaged fittings for tough applications.



Specifications

Tubing: Nylon, 1/8 in. (3 mm) I.D. suitable for continuous service from -40 to 200°F (-40 to 93°C). Intermittent service +250°F (121°C).

Fittings: Brass and steel.

Adaptors: Brass and steel.

Washers: Copper (supplied with all non-tapered thread fittings).

Working Pressure:

2,500 psi (17.2 MPa) [172.0 bar].

Minimum Burst Pressure:


10,000 psi (68.9 MPa) [689.0 bar] @ 200°F (93°C).



How to Order

To order the oil pressure tubing kit to fit your application use the diagram below. Specify the Deluxe base model number, gauge fitting, length of hose in inches, engine fitting, and engine adapter (**Note:** designate "Z" if no gauge fitting, engine fitting or adaptor is required). Model number example: **DHK-A-72-C-Z**

Deluxe Tubing Kit

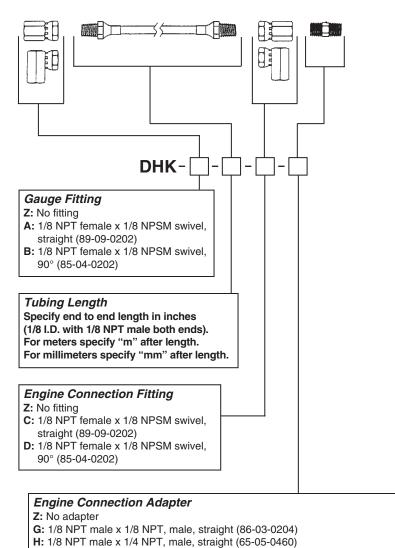



FW Murphy

P.O. Box 470248
Tulsa, Oklahoma 74147 USA
+1 918 317 4100
fax +1 918 317 4266
e-mail sales@fwmurphy.com
www.fwmurphy.com

CONTROL SYSTEMS & SERVICES DIVISION

P: 1/8 NPT male x 1/8 BSPT, male, straight (65-05-0464)

P.O. Box 1819; Rosenberg, Texas 77471; USA +1 281 633 4500 fax +1 281 633 4588 e-mail sales@fwmurphy.com

MURPHY DE MEXICO, S.A. DE C.V.

Blvd. Antonio Rocha Cordero 300, Fracción del Aguaje San Luis Potosí, S.L.P.; México 78384 +52 444 8206264 fax +52 444 8206336 Villahermosa Office +52 993 3162117 e-mail ventas@murphymex.com.mx www.murphymex.com.mx

FRANK W. MURPHY, LTD.

Church Rd.; Laverstock, Salisbury SP1 1QZ; U.K. +44 1722 410055 fax +44 1722 410088 e-mail sales@fwmurphy.co.uk www.fwmurphy.co.uk

MURPHY SWITCH OF CALIFORNIA

41343 12th Street West
Polmdale, California 93551-1442; USA
+1 661 272 4700 fax +1 661 947 7570
e-mail sales@murphyswitch.com
www.murphyswitch.com

MACQUARRIE CORPORATION

1620 Hume Highway Campbellfield, Vic 3061; Australia +61 3 9358 5555 fax +61 3 9358 5558 e-mail murphy@macquarrie.com.au



K: 1/8 NPT male x M10-1.0, straight (65-05-0461) with seal washer (65-05-0465) **M:** 1/8 NPT male x M12-1.5, straight (65-05-0462) with seal washer (65-05-0456) **N:** 1/8 NPT male x M14-1.5, straight (65-05-0463) with seal washer (10-05-0601) **O:** 1/8 NPT male x M18-1.5, straight (65-05-0474) with seal washer (10-05-0605)