


Oil Pressure Tubing Kit

PTK-8165B
Revised 03-99
Catalog Section 05
(00-02-0032)

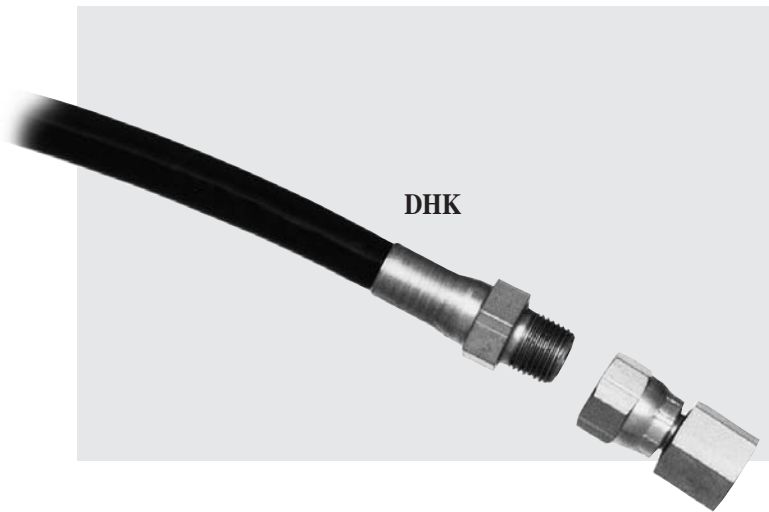

DHK Model

- Custom Fit Oil Pressure Line for Any Engine
- Swaged Fittings
- Wide Pressure and Temperature Compatibility
- Tough Materials for Industrial Use
- Adapters for U.S. or Metric

Description

The Deluxe (DHK) oil pressure tubing kit can be used with a variety of Murphy SWICHGAGE® and MURPHYGAGE® instruments. This kit consists of gauge fitting, pressure tubing, and engine fitting.

The Deluxe kit is ideal for heavy-duty industrial applications. The nylon core is reinforced with a synthetic fiber braid and polyurethane cover. Both ends of the pressure tubing have swaged fittings.

The Deluxe kit allows you to choose the type of gauge and engine fittings for your application. Choose straight or elbow fittings for both gauge and engine connections. In addition, the kit offers a variety of engine adapters to fit your application. These adapters are available in U.S. or metric threads.

Features

Deluxe Kit


- Tubing will not swell or absorb fluids which can cause restriction of the I.D. or release contaminants into the system.
- Synthetic fiber reinforcing braid eliminates wire that often fatigues, breaks, and may puncture the core tube.
- Thermoplastic core tube is resistant to practically all oils and hydraulic fluids.
- Swaged fittings for tough applications.

Deluxe Kit Tubing Detail

Nylon-lined core tube

Synthetic fiber braid

Polyurethane cover

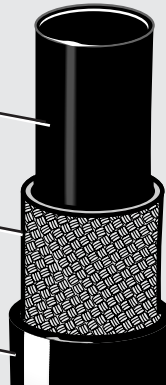

Specifications

Tubing: Nylon, 1/8 in. (3 mm) I.D. suitable for continuous service from -40 to 200°F (-40 to 93°C). Intermittent service +250°F (121°C).

Fittings: Brass and steel.

Adaptors: Brass and steel.

Washers: Copper (supplied with all non-tapered thread fittings).

Working Pressure:

2,500 psi (17.2 MPa) [172.0 bar].


Minimum Burst Pressure:

10,000 psi (68.9 MPa) [689.0 bar]
@ 200°F (93°C).

How to Order

To order the oil pressure tubing kit to fit your application use the diagram below. Specify the Deluxe base model number, gauge fitting, length of hose in inches, engine fitting, and engine adapter (**Note:** designate “Z” if no gauge fitting, engine fitting or adaptor is required). Model number example: **DHK-A-72-C-Z**

Deluxe Tubing Kit

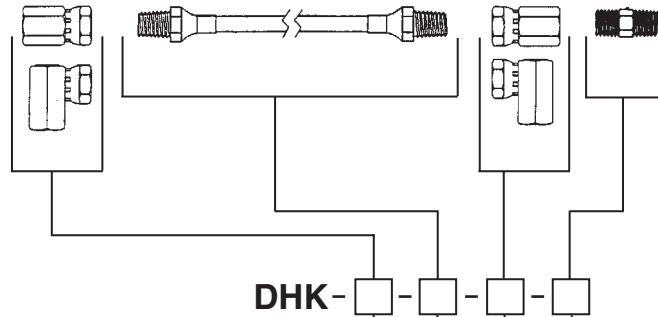

Gauge Fitting

Z: No fitting

A: 1/8 NPT female x 1/8 NPSM swivel, straight (89-09-0202)

B: 1/8 NPT female x 1/8 NPSM swivel, 90° (85-04-0202)

Tubing Length

Specify end to end length in inches (1/8 I.D. with 1/8 NPT male both ends).

For meters specify “m” after length.

For millimeters specify “mm” after length.

Engine Connection Fitting

Z: No fitting

C: 1/8 NPT female x 1/8 NPSM swivel, straight (89-09-0202)

D: 1/8 NPT female x 1/8 NPSM swivel, 90° (85-04-0202)

Engine Connection Adapter

Z: No adapter

G: 1/8 NPT male x 1/8 NPT, male, straight (86-03-0204)

H: 1/8 NPT male x 1/4 NPT, male, straight (65-05-0460)

K: 1/8 NPT male x M10-1.0, straight (65-05-0461) with seal washer (65-05-0465)

M: 1/8 NPT male x M12-1.5, straight (65-05-0462) with seal washer (65-05-0456)

N: 1/8 NPT male x M14-1.5, straight (65-05-0463) with seal washer (10-05-0601)

O: 1/8 NPT male x M18-1.5, straight (65-05-0474) with seal washer (10-05-0605)

P: 1/8 NPT male x 1/8 BSPT, male, straight (65-05-0464)



FW Murphy
P.O. Box 470248
Tulsa, Oklahoma 74147 USA

北京
信德迈科技(北京)有限公司 CNMEC Technology
北京朝阳区胜古中路2号金基业大厦201室
邮编：100029
电话：010-8428 2935 13910962635
传真：010-8428 8762
主页：//www.cnmec.com
电子邮件：sales@cnmec.biz

In order to consistently bring you the highest quality, full featured products, we reserve the right to change our specifications and designs at any time.

Printed in U.S.A. 0711690.