

Time Switches

Models 5T, 15T, 12T and 24T 12 or 24 Hour and 5 or 15 Minute



Features

- Two Versions Available:
 1. Hour Switch for Setting Run Time and Shutdown of Equipment
 2. Minute Switch for a Short Interruption of SWITCHGAGE® Circuits on Test or Start-up
- Spring Wound, No Electric Power Required
- Precision Movement Can Be Set to Zero at Any Time
- Built-in Stop Prevents Overwinding

Murphy Time Switches can automatically start or stop engines or electrical motors after a predetermined time. These time switches can be wired for a open or closed circuit when time expires. They require no electrical current to operate and have an SPDT contact arrangement. These switches feature a precision movement that gives years of reliable service. A built-in stop prevents overwinding.

The **12T** (12 hour) and **24T** (24 hour) time switches are enclosed in a NEMA 4 weatherproof enclosure. A hinged, gasketed cover and 1/2 NPT conduit connection allow for a dust tight installation. The enclosure includes a clasp and eye for padlock to prevent unauthorized operation. Instructions for popular engine applications are secured inside of the lid.


The **5T** (5 minute) and **15T** (15 minute) timers mount directly in control panels for short range timing with manual reset. These switches are perfect for disconnecting shutdown circuits while equipment is being started.

Applications


Murphy Time Switches are designed for use in the oil field, irrigation systems or anywhere equipment must operate or be controlled for a predetermined time. Mounted on a post or in a panel away from vibration and shock, these time switches give accurate, long term service.

Dimensions

12T and 24T 5TWP and 15TWP

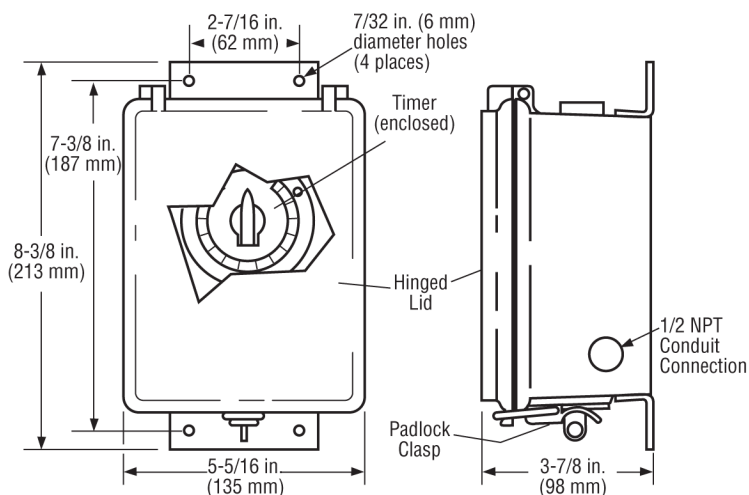

5T and 15T

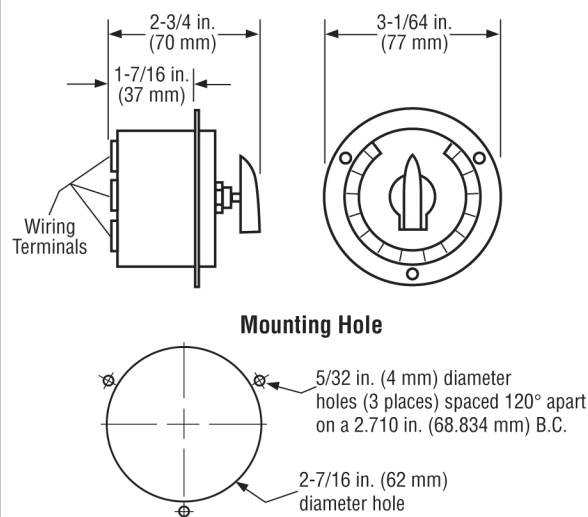

Typical Wiring Diagrams




WARNING


Before beginning installation of this Murphy product:

- ✓ Disconnect all electrical power to the machine.
- ✓ Make sure the machine cannot operate during installation.
- ✓ Follow all safety warnings of the machine manufacturer.
- ✓ Read and follow all installation instructions.


Electric Motor




Diesel Engine

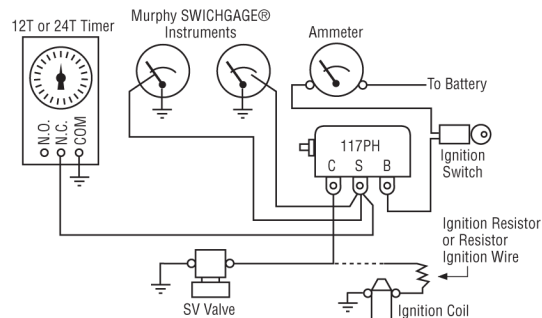


Fuel Valve and CD Ignition



Dual CD Ignition

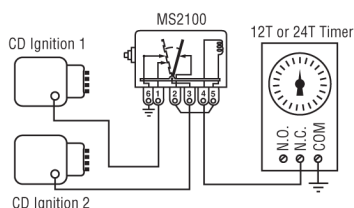

SWICHGAGE® Circuit Disconnect (5T and 15T)

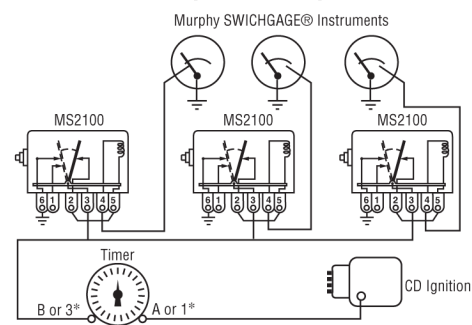

*Refer to Electrical diagrams on reverse side.

Specifications

Range:

- 12T: 0-12 hours in 15 minute intervals.
- 24T: 0-24 hours in 30 minute intervals.
- 5T: 0-5 minutes.
- 15T: 0-15 minutes.

Operating Temperature Range: 0°C to 85°C (32°F to 185°F).


Contact (all models): SPDT, rated 5 A @ 480 VAC; 10 A @ 250 VAC; 15 A @ 48 VDC.

Shipping Weight: 12T, 24T: 4 lbs. 12 oz. (2.15 kg). 5T and 15T: 6 oz. (11.66 g).

Shipping Dimensions: 12T, 24T: 9-1/4 x 8-1/4 x 5-1/2 in. (235 x 210 x 140 mm). 5T and 15T: 3 x 2-3/4 x 2-3/4 in. (76 x 70 x 70 mm).

How to Order

To order time switches, specify as follows:

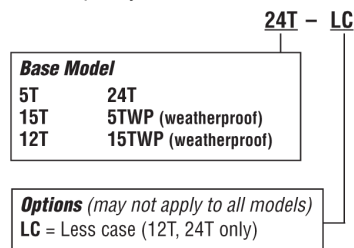

北京

信德迈科技(北京)有限公司 CNMEC Technology

地址：北京朝阳区胜古中路2号金基业大厦201室

邮编：100029

电话：010-8428 2935 13910962635

传真：010-8428 8762

主页：//www.cnmec.com

电子邮件：sales@cnmec.biz