

Scrubber Level Control System (SLS)

Automatic Level Control for Gas Scrubber Applications

The FW Murphy Gas Compressor Scrubber Level System

The system provides for liquid control in gas scrubber applications by dumping liquids to drain and protect compressors with high liquid level switch. Wetted metal parts are made to survive constant use in corrosive environments.

Filter Regulator and Gage

Instrument-quality
Air/Gas supply

Pneumatic Level Control

Float-actuated level snap-acting switch controls pneumatic pressure to open and close Dump Valve.
LS200NDVOR: Dump Valve Operator, pressure regulator and pressure indicating gage.

High Level Shutdown Switch

Float-actuated level switches to alarm and/or shutdown the equipment. LS200 and MLS-020 models available. Class 1, Division 1.

MLS / Electric models wired to control panel

Pneumatic Dump Valves

Two piece union design with manual valve operator allows soft plug and hard seat to be replaced without disassembling outlet piping or scrubber pipe connection. Diaphragm-actuated valves operate on 30-70 psi (207-483 kPa: 2-5 bar).



You Save Money By Purchasing The SLS System Which Includes the Following:

- **LS200, MLS-020*** High Level Shutdown Switch
- **DVU**** Pneumatic Dump Valve
- **LS200NDVOR** Pneumatic Level Control with:
- **Filter Regulator with Gage**
For detailed information on Level Switches and Dump Valves visit www.fwmurphy.com.

* Choose model using the How To Order matrix.

**Specify Dump Valve model when ordering.

Service Tip

The Gage and Filter/Regulator on the LS200NDVOR help keep the control medium clean and dry. It also allows operator to adjust pressure to recommended level of 30-70 psig. The Gage and Filter/Regulator are recommended to help increase system life and trouble-free operation.

Level Switches

- Designed for Harsh Gas Compressor Scrubber Applications.
NOTE: Not recommended for hydrogen gas applications.
- Stainless Steel Float: Specific gravity varies by model and configuration, see Specific Gravity.
- For Separators/Scrubbers rated for up to 2000 psi (13.8 MPa) [138 bar] Working Pressure.
- Electric and Pneumatic Models Available.

Dump Valve Operator/ Dump Valve

- Hex Union Allows Plug and Seat Replacement Without Piping Removal.
- Operates on 30-70 psi (207-483 kPa) [2.07-4.83 bar] Control Pressure.
- Manual Valve Operator.

Specific Gravity

Minimum Allowable Specific Gravity			
Model	Float Extension Length (inch)	Pressure (psi)	Specific Gravity
LS200	0	2000	0.55
	1		0.7
LS200NDVO	0	2000	0.63
	1		0.73
MLS-020	0	2000	0.5
	1		0.65

NOTE: DO NOT OVERPRESSURE. The stainless-steel float may be deformed if exposed to pressure beyond rated (2000 psi). This can affect specific gravity and overall operation.

How To Order

Approximate Shipping of SLS2120 Kit

Weight: 25 lb. 6 oz. (8.7 kg)

Dimensions: (w x h x d) 15 x 15 x 12 in. (381 x 381 x 305 mm)

SLS

The SLS Kits Include LS200, LS200NDVO(R) and a DVU Valve.

SLS150		-		LR	
Options					
Blank = Include Filter/ Regulator					
LR = Less Regulator					
Model	Dump Valve	Inlet	Outlet	Trim Size	Maximum Working Pressure
SLS150	DVU150	1" NPT	1/2" NPT	0.359 IN. (9 MM)	1800 psi
SLS175*	DVU175	1" NPT	3/4" NPT	0.359 IN. (9 MM)	1800 psi
SLS2120	DVU2120	2" NPT	1" NPT	0.436 IN. (11 MM)	2000 psi

*Filter/regulator option not available.

LR: Less regulator option is available with all models.

MSLS

The MSLS Kits Include MLS-020, LS200NDVO(R) and a DVU Valve.

MSLS150		-		LR		TF	
Options							
Blank = Include Filter/ Regulator				Blank = Without Test Function			
LR = Less Regulator				TF = Test Function			
Model	Dump Valve	Inlet	Outlet	Trim Size	Maximum Working Pressure		
MSLS150	DVU150	1" NPT	1/2" NPT	0.359 IN. (9 MM)	1800 psi		
MSLS175*	DVU175	1" NPT	3/4" NPT	0.359 IN. (9 MM)	1800 psi		
MSLS2115	DVU2115	2" NPT	1" NPT	0.571 IN. (14.5 MM)	1500 psi		
MSLS2120	DVU2120	2" NPT	1" NPT	0.436 IN. (11 MM)	2000 psi		

*Filter/regulator option not available.

LR: Less regulator option is available with all models.

TF: Test function option available with less regulator (except MSLS2115).


FW Murphy 仪器仪表签约中国经销商: 北京卡梅迩控制技术有限公司

地址: 北京朝阳区望京 SOHO-T1-C 座 2115 室 邮编: 100102

手机: 139 1096 2635 电子邮件: sales@cnmec.biz

Accessories

Float Chamber 15051098

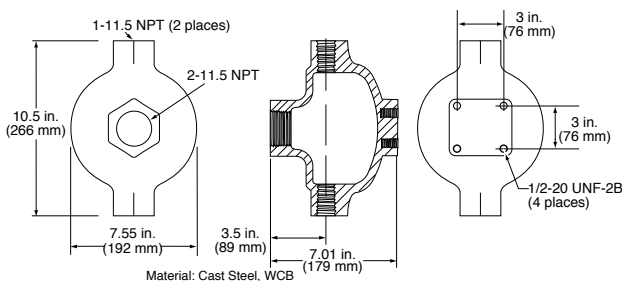


Operating Pressure: 2000 psi (13.8 MPa) [138 bar]

Operating Temperature: 400° F (204° C)

Shipping Weight: 32 lb. (14.5 kg)

Weld Collar 15050375

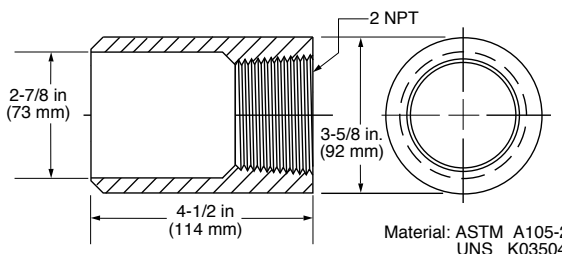


Operating Pressure: 2000 psi (13.8 MPa) [138 bar]

Operating Temperature: 400° F (204° C)

Shipping Weight: 6 lb. (2.7 kg)

Series 100 Float Chamber 15700799

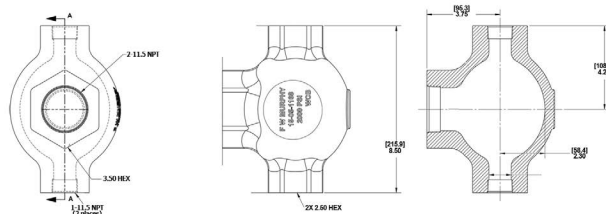


Operating Pressure: 2000 psi (13.8 MPa) [138 bar]

Operating Temperature: 400° F (204° C)

Shipping Weight: 18 lb. (8.16 kg)

1-Inch Float Shaft Extensions

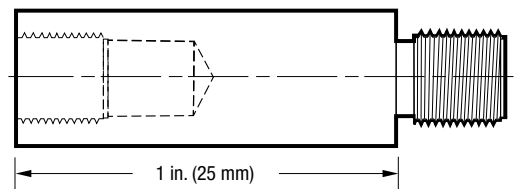

Float Shaft Extension **15000478** (LS200) 12-24 UNC threads

Float Shaft Extension **15000892** (MLS) 10-32 UNF threads



FM 668576 (San Antonio, TX - USA)
FM 668933 (Rosenberg, TX - USA)