

# Swichgage<sup>®</sup> Shutdown Panel Kit – W0168 and W0241



The W0168 and W0241 panel kits are universal-fit instrument panels for most industrial engines. They include Swichgage protection for low engine oil pressure and high coolant or high oil temperature. These Panel Kits are similar-the W0168 has a start/stop key switch and the W0241 has a start push button.

## Panel kits include:

- Low Lube Oil Pressure Swichgage instrument.
- High Coolant/Oil Temperature Swichgage.
- 518PH Magnetic Switch.
- Emergency stop push button.
- Ignition key switch for start/stop (W0168).

- Push button for start (W0241).
- Ammeter 60-0-60.
- Provisions for additional Swichgage controls, such as irrigation pump pressure or engine oil temperature.
- · Provisions for tachometer and throttle cable.

Swichgage product is two-instruments-in one: (1) an accurate indicating gage with (2) a built-in, adjustable limit switch.

A 518PH Magnetic Switch provides a Closed-loop circuit to ensure proper operation at all times. The 518PH allows the system to be sensitive to open circuits, broken wires, false grounds, corrosion, loss of power and other factors which could otherwise prevent the protective controls from operating.

**The universal mounting panel** is enclosed on all 4 sides with open back. An optional back cover (model no. 30050800) is available for both kits. Panel Kits are prewired and ready to install and are available for 12 or 24 VDC systems.<sup>\*</sup>

# **Specifications**

- Low Lube Oil Pressure Swichgage Instrument:
  - 0-100 psi (0-689 kPa) [0-6.89 bar]
  - 1/8 NPT process connection
- High Coolant/Oil Temperature Swichgage Instrument: • 130-250°F (54-121°C)
  - 130-250°F (54-121°C)
    48 in. (1.2 m) capillary
  - 48 m. (1.2 m) capillary
    1/2 NPT process connection

How to Order

**518PH Magnetic Switch:** 12 or 24 volt (specify) **Ammeter:** 60-0-60 **Shipping Weight:** 8 lbs. 8 ozs. (3.9 kgs.) **Shipping Dimensions:** 16 x 11 x 5-1/2 in. (406 x 279 x 140 mm)


To order a Shutdown Panel Kit for your application, specify model number.

W0168 W0168B (back cover) W0241


<sup>\*</sup> NOTE: 12 volt kit is standard. If you require 24 volt kit-specify when ordering.

In order to consistently bring you the highest quality, full featured products, we reserve the right to change our specifications and designs at any time. MURPHY products and the Murphy logo are registered and/or common law trademarks of Murphy Industries, LLC. This document, including textual matter and illustrations, is copyright protected by Murphy Industries, LLC, with all rights reserved. (c) 2011 Murphy Industries, LLC.

#### Dimensions

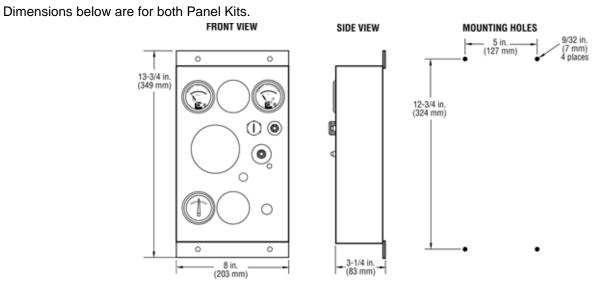

## **Typical Wiring Diagram**

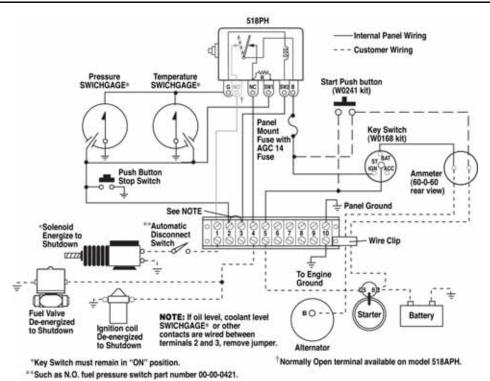

Warranty - A limited warranty on materials and workmanship is given with this FW Murphy product. A copy of the warranty may be viewed or printed by going to http://www.fwmurphy.com/warranty