Maintain Lube Level



Model LR857

- Eliminates Under/OverFill Due to "Human Error"
- Simple Installation
- Automatically Maintains Lube Level
- Low Level Switch
- Models to Fit Varied Applications
- Positive Sealing Thumb-Valve[™]

Description

Murphy LR857 Lube Level Regulator maintains the crankcase oil level of an engine, pump or compressor. Adjusted to the correct *running-oillevel*, the LR857 will replenish oil as it is used. An integral, low-level switch will alarm and/or shutdown the equipment if supply oil is lost and the equipment continues to use oil.

Application

The LR857 maintains oil level on any size engine, but is recommended for small to medium volume applications and installations that require a 3-wire, snap-action switch.

How the LR857 Maintains Levels

As crankcase oil level drops, the LR857 float also drops and opens the Thumb-Valve[™] This allows oil to flow from the supply tank, through the LR857, and into the crankcase. When proper level is attained in the crankcase, the LR857 float rises, causing the Thumb-Valve to close off further oil flow.

The simple and unique Thumb-Valve is nonclogging and provides a positive, leak-free seal.

Flow rate through the ¹/₈ inch (3 mm) orifice is significant to allow crankcase refill through the LR857.

Specifications

Inlet Connection: 5/8 in. (16 mm) I.D. hose Outlet Connection: 3/8 NPT

Snap-switch: SPDT rating 10 A @ 125 VAC; 0.5 A @ 125 VDC; 10 A @ 30 VDC.

Conduit Connection: 1/2 NPT


Case: Die cast aluminum

Lens: Polycarbonate

Float: Brass

Flow Rates (see chart below):

Oil with 0.9 specific gravity @ 70°F (21°C)



Thumb-Valve Operation

As the equipment uses oil, the float falls, providing immediate level compensation. At FULL position, the float holds the valve closed. If the clean oil supply is depleted and oil level continues to fall, the low level switch will operate an alarm or equipment shutdown.

Simplified Drawing of Thumb-Valve Operation Thumb-Valve TM FULL Float Action N.O. N.O. N.C. N.C. COM

Fittings Kit: 15000420

The 15000420 kit is sold separately. It includes the following items.

Quantity	Description
1	1/4 in. (6 mm) O.D copper cane tube (vent connection)
1	1/4 in. (6 mm) tube x 1/4 male pipe fitting
1	1/2 in. (13 mm) I.D. hose fitting (outlet connection)


Warranty

A limited warranty on materials and workmanship is given with this FW Murphy product. A copy of the warranty may be viewed or printed by going to <u>www.fwmurphy.com/support/warranty.htm</u>

** Products covered by this bulletin comply with EMC Council directive 89/336/EEC regarding electromagnetic compatibility except as noted.



Dimensions

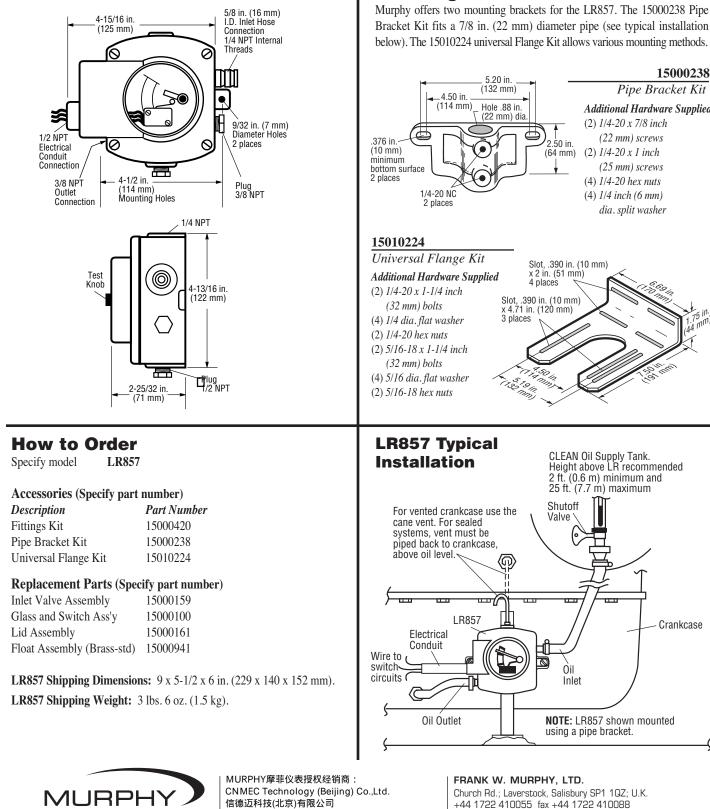

FW Murphy P.O. Box 470248 Tulsa, Oklahoma 74147 USA +1 918 317 4100 fax +1 918 317 4266 e-mail sales@fwmurphy.com

www.fwmurphy.com

地址:北京市朝阳区胜古中路2号金基业大厦201室 邮编:100029

电话:010-84282935,84289077, Http://www.cnmec.com Email: sales@cnmec.biz 传真:010-8428 8762

FRANK W. MURPHY, LTD.

Mounting Brackets with Hardware

2.50 in.

(64 mm)

15000238

Pipe Bracket Kit

Additional Hardware Supplied (2) $1/4-20 \times 7/8$ inch

(22 mm) screws

(25 mm) screws

dia. split washer

(2) $1/4-20 \times 1$ inch

(4) 1/4-20 hex nuts

(4) 1/4 inch (6 mm)

CLEAN Oil Supply Tank. Height above LR recommended

Crankcase

2 ft. (0.6 m) minimum and 25 ft. (7.7 m) maximum

Shutoff

Òil

Inlet

NOTE: LR857 shown mounted using a pipe bracket.

Valve

Church Rd.; Laverstock, Salisbury SP1 1QZ; U.K. +44 1722 410055 fax +44 1722 410088 e-mail sales@fwmurphy.co.uk www.fwmurphy.co.uk

L Ø



Printed in U.S.A. 850740B

In order to consistently bring you the highest quality, full featured products, we reserve the right to change our specifications and designs at any time.